

Rialto NC

0.014" system

Non-Compliant OTW


Designed to treat BTK lesions



Excellent performance in routine and challenging cases

Designed to treat resistant lesions

Optimized balloon strength RBP up to 22atm

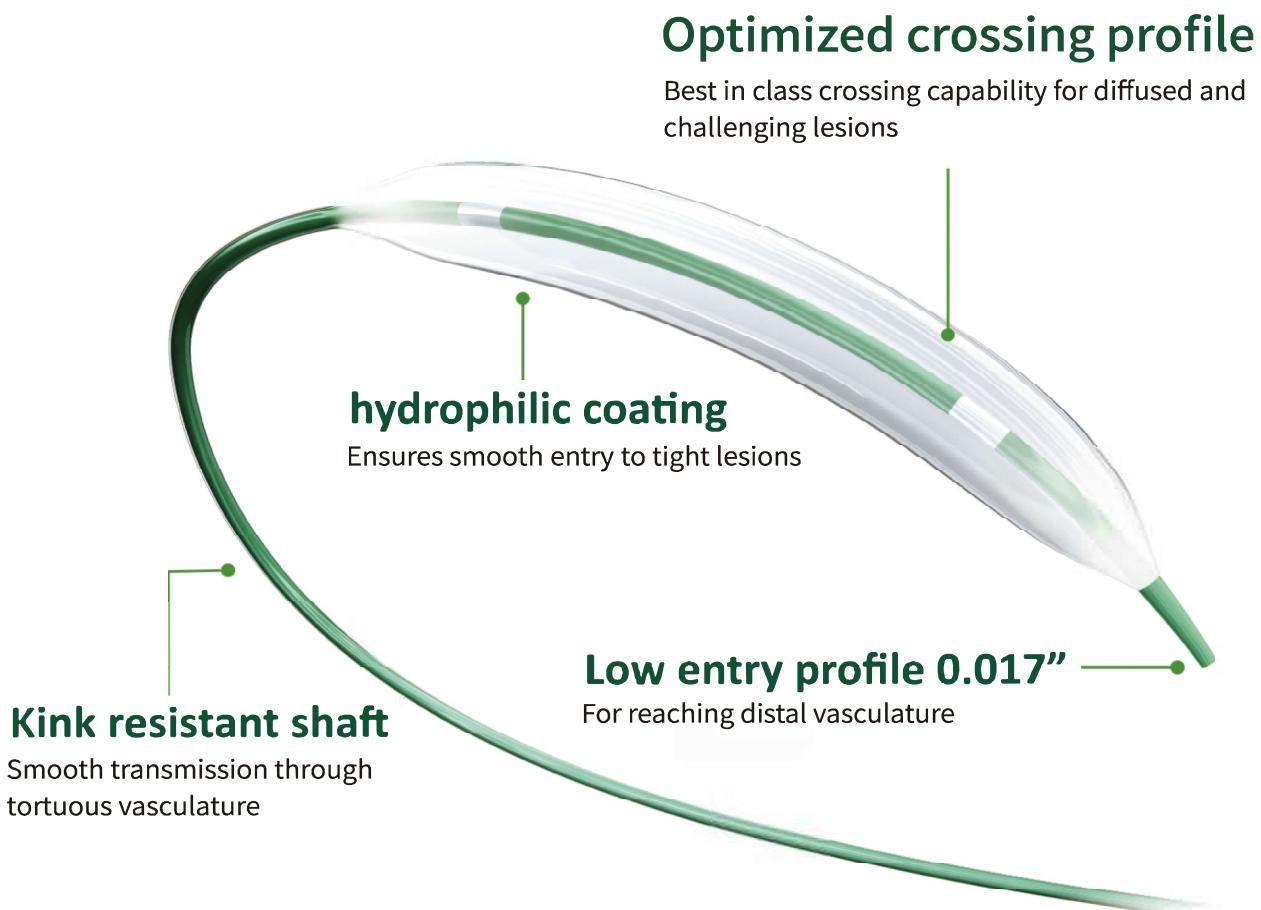

Optimized crossing profile

Best in class crossing capability for diffused and challenging lesions

hydrophilic coating

Ensures smooth entry to tight lesions

Kink resistant shaft

Smooth transmission through tortuous vasculature

Low entry profile 0.017"

For reaching distal vasculature

Specifications

Balloon Diameter (mm)	Balloon Length (mm)									Catheter Working Length (cm)	Sheath Compatibility (F)	Nominal Pressure (atm)	Rated Burst Pressure (atm)
	10	15	20	30	40	60	80	100	150				
2.0	V	V	V	V	V	V	V	V	V	70	4	12	22
2.5	V	V	V	V	V	V	V	V	V	70	4	12	22
3.0	V	V	V	V	V	V	V	V	V	70	4	12	22
3.5	V	V	V	V	V	V	V	V	V	70	4	12	22
4.0	V	V	V	V	V	V	V	V	V	70	4	12	22
4.5	V	V	V	V	V	V	V	V	V	70	5	12	20
5.0	V	V	V	V	V	V	V	V	V	70	5	12	20
5.5	V	V	V	V	V	V	V	V	V	70	5	12	20
6.0	V	V	V	V	V	V	V	V	V	70	5	12	20
7.0	V	V	V	V	V	V	V	V	V	70	6	12	18
2.0	V	V	V	V	V	V	V	V	V	90	4	12	22
2.5	V	V	V	V	V	V	V	V	V	90	4	12	22
3.0	V	V	V	V	V	V	V	V	V	90	4	12	22
3.5	V	V	V	V	V	V	V	V	V	90	4	12	22
4.0	V	V	V	V	V	V	V	V	V	90	4	12	22
4.5	V	V	V	V	V	V	V	V	V	90	5	12	20
5.0	V	V	V	V	V	V	V	V	V	90	5	12	20
5.5	V	V	V	V	V	V	V	V	V	90	5	12	20
6.0	V	V	V	V	V	V	V	V	V	90	5	12	20
7.0	V	V	V	V	V	V	V	V	V	90	6	12	18
2.0	V	V	V	V	V	V	V	V	V	150	4	12	22
2.5	V	V	V	V	V	V	V	V	V	150	4	12	22
3.0	V	V	V	V	V	V	V	V	V	150	4	12	22
3.5	V	V	V	V	V	V	V	V	V	150	4	12	22
4.0	V	V	V	V	V	V	V	V	V	150	4	12	22
4.5	V	V	V	V	V	V	V	V	V	150	5	12	20
5.0	V	V	V	V	V	V	V	V	V	150	5	12	20
5.5	V	V	V	V	V	V	V	V	V	150	5	12	20
6.0	V	V	V	V	V	V	V	V	V	150	5	12	20
7.0	V	V	V	V	V	V	V	V	V	150	6	12	18

Remark: Sizes within  have longer delivery time.



cNovate Medical BV
 Address: Terminalweg 15, 3821AJ Amersfoort, The Netherlands
 Tel: +31 850140404 E-mail: cs@cNovate.eu Web:www.cNovate.eu

